




Full Strength Reduction 1:10

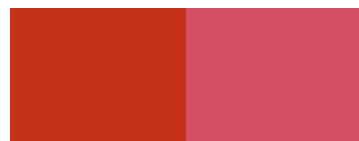

RED SR
Pigment Red 170
C.I. No. 12475

APPLICATIONS											
Printing Inks					Paints			Plastics			
Heat Set	Cold Set	Water Based	Solvent Based	NC Based	Air Drying	Stoving	Water Based	Plastics	PVC	Rubber	Textile Emulsion
Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y

Y = Recommended; N = Not Recommended

Specific Gravity	Bulk Volume	Oil Absorption gm / 100 gm	FASTNESS PROPERTIES						PHYSICAL AND CHEMICAL PROPERTIES															
			Light (1 ÷ 8) Scale	Heat (1 ÷ 5) Scale	Overspray (1 ÷ 5) Scale	Reagents (1 ÷ 5) Scale	Solvents (1 ÷ 5) Scale					Plasticizers / Oils (1 ÷ 5) Scale												
Full Strength	Reduction Tone	150°C / 20 Min.	180°C / 10 Min.	120°C / 30 Min.	N. C. Lacquer	Water	5% Acid HCL	5% Alkali NaOH	Ethanol	N-Butanol	N-Butyl Acetate	M.E.K.	White Spirit	Xylene	Mixed NC Solvents	DEG	D.B.P.	D.O.P.	Linseed Oil	Oleic Acid	Soap	Paraffin Wax		
1.4	3.5	50	6-7	6	5	5	4	5	5	5	5	5	5	4	4	3	5	3	3	5	5	5	5	2